

iX2000

iX SERIES
Commercial/Residential
Portable Generators

GENERAC®

A/C Rated Output Watts: 2000

A/C Maximum Output Watts: 2200

Model 5793-2

UPC Number: 696471057935 Emissions Certification: 49/cETL



features

- INVERTER TECHNOLOGY CREATES QUIET, CLEAN POWER
- LIGHTWEIGHT, COMPACT DESIGN
- VARIABLE ENGINE SPEED ADJUSTS TO MEET DEMAND
- FLEXPOWER™ MODE SAVES FUEL AND REDUCES NOISE
- ELECTRONIC OVERLOAD PROTECTION
- LOW-OIL SHUT DOWN ENGINE PROTECTION
- 12V DC OUTLET WITH CHARGING CABLE
- DURABLE, FULLY ENCLOSED CASE
- LED STATUS INDICATOR LIGHTS

customer connections

Connection Outlets


Α	(2) 5-20R 120V
В	1x12VDC

Circuit Breakers

M Internal Circuit Breakers

Other Features

H Flex Power

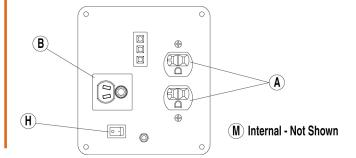

iX2000

specifications

Product Series	iX2000
Model	5793-2
Configuration/Emissions	49/cETL
A/C Rated Output Watts:	2000
A/C Maximum Output Watts:	2200
A/C Voltage	120vac
A/C Frequency	60 Hz
Rated 120/240 VAC Amperage	16.6
Max 120/240 VAC Amperage	18.3
Engine Displacement	126cc
Engine Type	OHV
Engine RPM	Variable
Recommended Oil	SAE 30
Lubrication Method	Splash Sump
Choke Type	Manual Lever
Fuel Shut Off	Manual Lever
Idle Control	FlexPower
Starting Method	Manual
Battery	N/A
Battery Size	N/A
Low Oil Shutdown Method	Low Level

Start Switch Type	On/Off Toggle
Switch Location	Side of Unit
Single-Point Lifting Eye	N/A
Fuel Gauge	N/A
Fuel Tank Capacity (Gal)	1.00
Fuel Tank Capacity (Ltrs)	3.79
Run Time at 50% (Hours)	4.70
Cord Set	N/A
Handle Style	Fixed
Wheel type	N/A
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year
Warranty - Commercial	6 Months

dimensions and weights

Length (L)	22.0
Width (W)	12.0
Height (H)	18.0
Extended Length (EL)	22.0
Carton Length	25.3
Carton Width	14.3
Carton Height	21.3
Unit Weight (lbs)	49.6
Shipping Weight (lbs)	58.0

