

GP6500E

GP SERIES
Commercial/Residential
Portable Generators

A/C Rated Output Watts: 6500
A/C Maximum Output Watts: 8000

Model 5941-0

UPC Number: 696471059410
Emissions Certification: 49-State



features

- LONG LIFE OHV ENGINE
- LOW OIL SHUTDOWN PROTECTION
- COVERED, CIRCUIT BREAKER PROTECTED OUTLETS
- STEEL FUEL TANK WITH BUILT-IN FUEL GAUGE
- LOCKING, FOLD-DOWN HANDLE
- NEVER-FLAT WHEEL KIT
- 1.25" HARDENED STEEL TUBE FRAME
- ELECTRIC START - BATTERY INCLUDE
- HOUR METER TO TRACK MAINTENANCE
- LOW TONE MUFFLER

customer connections

Connection Outlets


| | |
|---|-----------------------------|
| A | (4) 5-20R 120V |
| B | L14-30R Twist-Lock 120/240V |

Circuit Breakers

| | |
|---|---------|
| M | (2) 20A |
| N | (2) 25A |

Other Features

| | |
|---|-----------------------------|
| H | Hour Meter |
| I | Off/On/Start Switch |
| J | 12VDC Battery Charger Input |

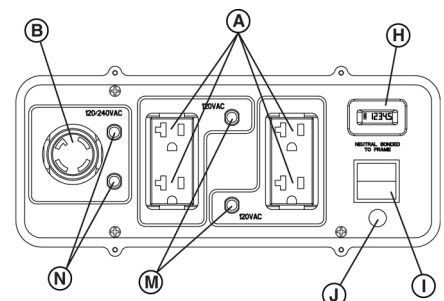

GP6500E

specifications

| | |
|----------------------------|-----------------|
| Product Series | GP6500E |
| Model | 5941-0 |
| Configuration/Emissions | 49-State |
| A/C Rated Output Watts: | 6500 |
| A/C Maximum Output Watts: | 8000 |
| A/C Voltage | 120/240VAC |
| A/C Frequency | 60 Hz |
| Rated 120/240 VAC Amperage | 27.1 |
| Max 120/240 VAC Amperage | 33.3 |
| Engine Displacement | 389cc |
| Engine Type | OHV |
| Engine RPM | 3600 |
| Recommended Oil | SAE30 |
| Lubrication Method | Splash Sump |
| Choke Type | Manual Lever |
| Fuel Shut Off | Manual Lever |
| Idle Control | Full Speed |
| Starting Method | Electric/Manual |
| Battery | Included |
| Battery Size | 12VDC 10 Ahr |
| Low Oil Shutdown Method | Low Level |

| | |
|---------------------------|-------------------|
| Start Switch Type | 3-Position |
| Switch Location | On Control Panel |
| Single-Point Lifting Eye | N/A |
| Fuel Gauge | Built-in Tank |
| Fuel Tank Capacity (Gal) | 7.20 |
| Fuel Tank Capacity (Ltrs) | 27.25 |
| Run Time at 50% (Hours) | 10.00 |
| Cord Set | N/A |
| Handle Style | Folding |
| Wheel type | 9.5" Solid Wheels |
| Maintenance Kit | Sold Separately |
| Warranty - Residential | 2 Year |
| Warranty - Commercial | 1 Year |

dimensions and weights

| | |
|-----------------------|-------|
| Length (L) | 28.8 |
| Width (W) | 26.8 |
| Height (H) | 25.0 |
| Extended Length (EL) | 45.0 |
| Carton Length | 31.0 |
| Carton Width | 21.7 |
| Carton Height | 23.5 |
| Unit Weight (lbs) | 195.0 |
| Shipping Weight (lbs) | 209.0 |

